

Notes: Install new crickets on the high side of all curbs
Include replacing 10 sheets of 4' x 8' plywood matching existing
Include replacing 140 linear feet of fascia board
Remove gutters and metal fascia cover to expose fascia board
Re-Install gutters and fascia board cover after fascia board installation
Clean gutters and downspouts of all debris and re-seal joints
Include 16 feet of walkway pads

CAPISTRANO UNIFIED SCHOOL DISTRICT

33122 VALLE ROAD, SAN JUAN CAPISTRANO


Project

RH DANA ELEMENTARY SCHOOL

ADMINISTRATION BLDG RE-ROOF PROJECT

Address

24242 LA CRESTA DRIVE, DANA POINT

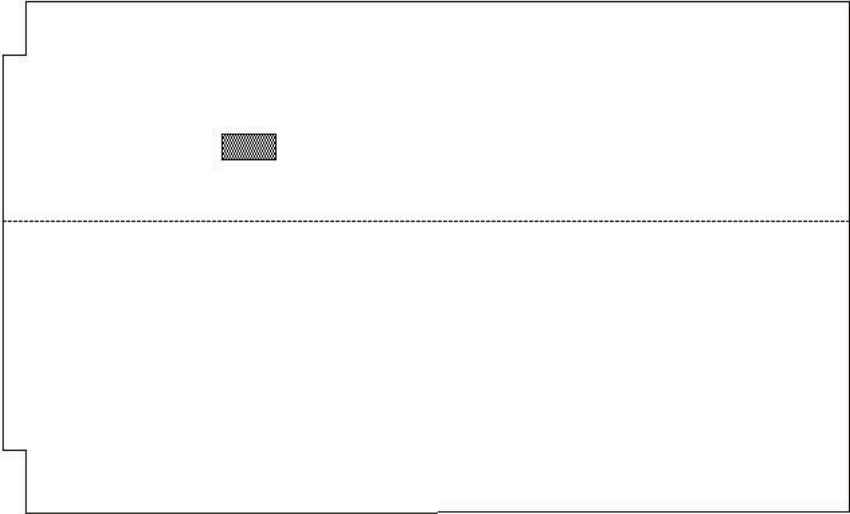

075416 KETONE ETHYLENE ESTER ROOFING



SERVICEABLE EQUIPMENT

